


392 Series, TE5® Time-Lag Fuse

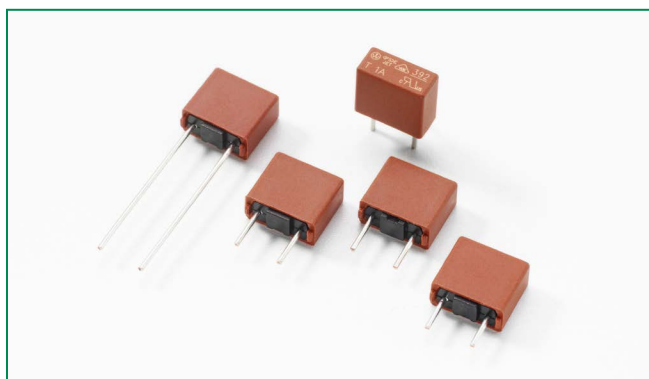

Agency Approvals

Agency	Agency File Number	Ampere Range
	126983	800mA - 6.3A
	1410866 1026673	800mA - 4A 5A - 6.3A
	E67006	280mA - 6.3A
	JET1896-31007-2002	1A - 5A
	CQC07012021162	800mA - 6.3A
	SU05024-7013 SU05024-7014 SU05024-7015 SU05024-7016 SU05024-7017 SU05024-7018	800mA - 6.3A

Description

TE5®, time-Lag type, 250V rated, designed in accordance to IEC 60127-3.

Features

- Lead-free
- Reduced PCB space requirements
- Direct solderable or plug-in versions
- Internationally approved
- Low internal resistance
- Shock safe casing
- Vibration resistant
- Halogen free

Applications

- Battery Charges
- Consumer Electronics
- Power supplies
- Industrial Controllers

Additional Information



Datasheet



Resources



Samples

Electrical Characteristics for Series


% of Ampere Rating	Opening Time
150%	1 Hour, Min.
210%	120 s, Max.
275%	400 ms Min. ; 10 Sec. Max.
400%	150 ms Min. ; 3 Sec. Max.
1000%	20 ms Min. ; 150 ms Max.

Electrical Characteristic Specifications by Item


Rated Current	Amp Code	Voltage Rating	Breaking Capacity	Voltage Drop 1.0xI _N max. (mV)	Power Dissipation 1.5xI _N max. (mW)	Melting Integral 10xI _N min. (A²s)	Agency Approvals					
												
280 mA	0280	250V	35A/250 VAC	115	168	51.00			x			
800 mA	0800	250V	25A/250 VAC	110	280	3.80	x	x	x		x	x
1.00 A	1100	250V	25A/250 VAC	115	400	5.80	x	x	x	x	x	x
1.25 A	1125	250V	25A/250 VAC	100	500	9.75	x	x	x	x	x	x
1.60 A	1160	250V	25A/250 VAC	95	600	13.50	x	x	x	x	x	x
2.00 A	1200	250V	25A/250 VAC	90	700	21.00	x	x	x	x	x	x
2.50 A	1250	250V	25A/250 VAC	85	750	32.00	x	x	x	x	x	x
3.15 A	1315	250V	32A/250 VAC	80	1100	55.00	x	x	x	x	x	x
4.00 A	1400	250V	40A/250 VAC	75	1200	100.00	x	x	x	x	x	x
5.00 A	1500	250V	50A/250 VAC	70	1000	90.00	x	x	x	x	x	x
6.30 A	1630	250V	63A/250 VAC	65	1200	126.00	x	x	x		x	x

Note: 1.00 means the number one with two decimal places. 1,000 means the number one thousand.


Temperature Re-rating Curve

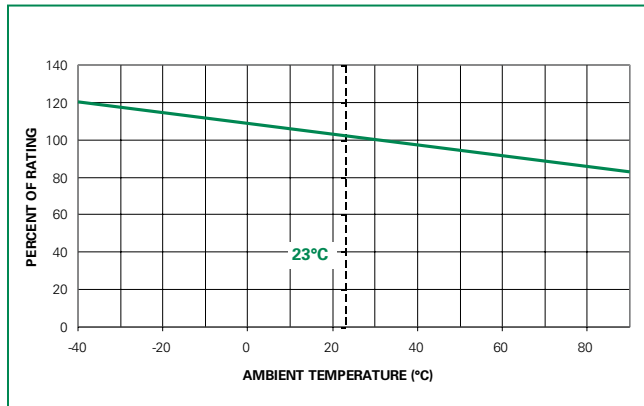

Average Time Current Curves

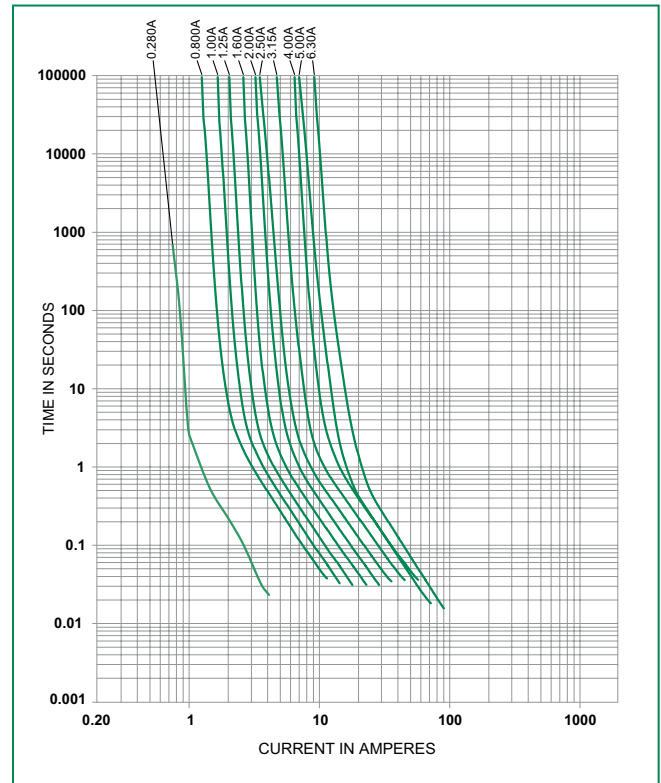

Soldering Parameters - Wave Soldering

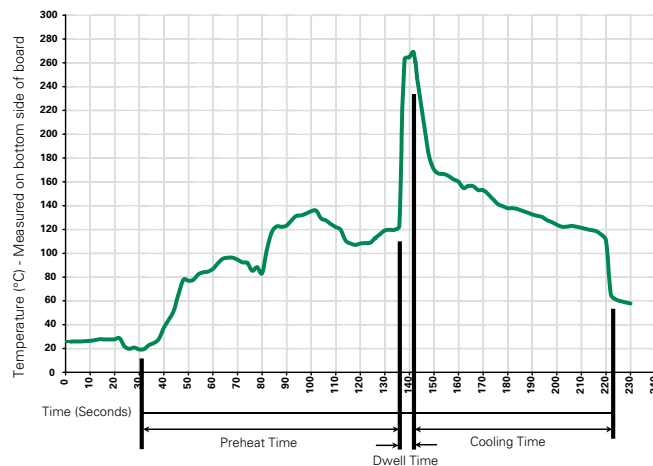

Recommended Process Parameters:

Wave Parameter	Lead-Free Recommendation
Preheat: (Depends on Flux Activation Temperature)	(Typical Industry Recommendation)
Temperature Minimum:	100° C
Temperature Maximum:	150° C
Preheat Time:	60-180 seconds
Solder Pot Temperature:	260° C Maximum
Solder Dwell Time:	2-5 seconds

Recommended Hand-Solder Parameters:

Solder Iron Temperature: 350° C +/- 5°C
Heating Time: 5 seconds max.

Note: These devices are not recommended for IR or Convection Reflow process.

